




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name:Dodecenylsuccinic anhydride

CAS:25377-73-5

Molecular Weight:266.38

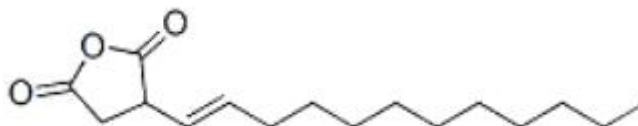

Item	Specification
Boiling point	150 °C3 mm Hg(lit.)
Density	1.005 g/mL at 25 °C(lit.)
Melting point	~45 °C
Flash point	>230 °F
Storage conditions	Store below +30°C.

Application:

Dodecenylsuccinic Anhydride is mainly used as a curing agent for epoxy resins, for casting and laminating products, with a general dosage of 120-150 °C. The product has good impact toughness and electrical properties, but slightly poor heat resistance. This product is also used in the production of paper adhesives, rust inhibitors, alkyd resin flexibility modifiers, plastic plasticizers, ink additives, leather hydrophobic treatment agents, desiccants, and polyvinyl chloride stabilizers.

Package:

Usually packed in 25kg/drum,and also can be do customized package.