




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name:UV Absorber 3030**

**CAS:178671-58-4**

**Molecular Weight:1061.14**

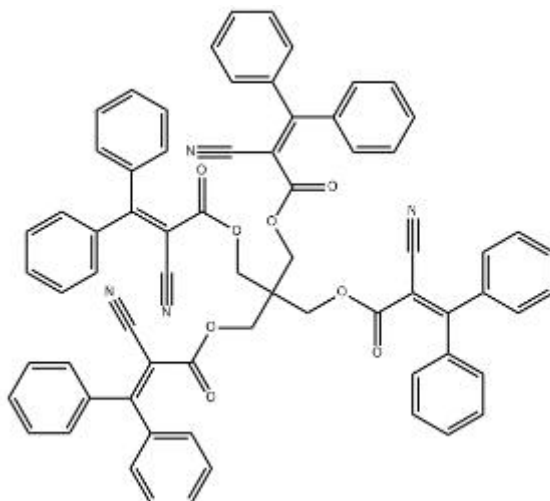

Item	Specification
Boiling point	1077.4±65.0 °C(Predicted)
Density	1.267±0.06 g/cm3(Predicted)
Storage conditions	Sealed in dry,Room Temperature
EINECS	924-350-7
MW	1061.14
purity	99%

## Application:

UV Absorber 3030 is used to protect plastic and coating products from UV radiation in sunlight. UV-3030 is particularly suitable for processing polymers with high processing temperatures, such as polycarbonate (PC), polyethylene terephthalate (PET), polyether sulfone, etc.

## Package:

Usually packed in 25kg/drum,and also can be do customized package.