




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: 2,4-Dihydroxybenzophenone

CAS: 131-56-6

Molecular weight: 214.22

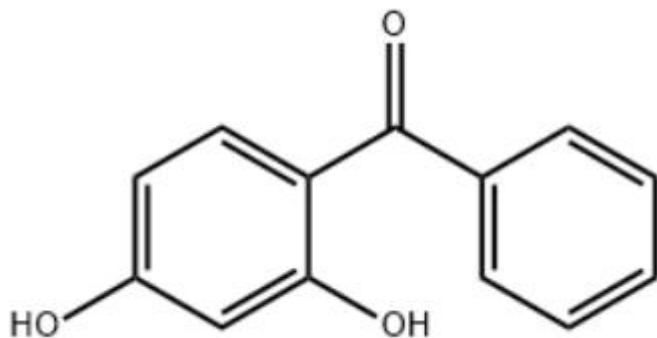

Item	Standard
Melting point	144.5-147 °C(lit.)
Boiling point	194 °C (1 mmHg)
Density	1,32 g/cm ³
Vapor pressure	0Pa at 25 °C
Refractive index	1.5090 (estimate)
Flash point	125 °C
LogP	2.964 at 25 °C
Acidity coefficient (pKa)	7.72±0.35(Predicted)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

2,4-Dihydroxybenzophenone is mainly used in polyester, chlorinated polyester, acetate, polyvinyl chloride, polystyrene, plexiglass, polyacrylonitrile and other resins. The stability in transparent products is better than in colored products. The amount in the product is 0.% ~ 0.5%.

Package:

25kg/drum or according to customer requirements.

Unilong Industry