




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name:3-Mercaptopropyltriethoxysilane**

**CAS:14814-09-6**

**Molecular Weight:238.42**

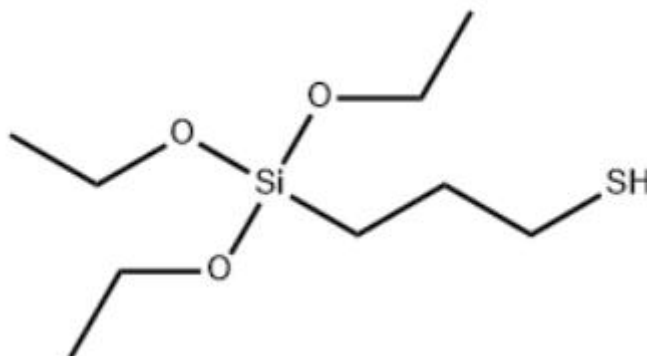

Item	Specification
sensitiveness	Moisture Sensitive
Density	0.987 g/mL at 20 °C (lit.)
boiling point	210 °C
SOLUBLE	Hydrolyzes slowly in water.
resistivity	1.4331
Storage conditions	2-8°C

## Application:

3-Mercaptopropyltriethoxysilane is commonly used to treat inorganic fillers such as silica and carbon black, and acts as an active agent, coupling agent, crosslinking agent, and reinforcing agent in polymers such as rubber and silicone rubber

## Package:

Usually packed in 25kg/drum,and also can be do customized package.