



# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China


Contact: +86-18653132120

Website: [www.unilongmaterial.com](http://www.unilongmaterial.com)

**Product name: Hexadecanethiol**

**CAS: 2917-26-2**

**Molecular wight:258.51**

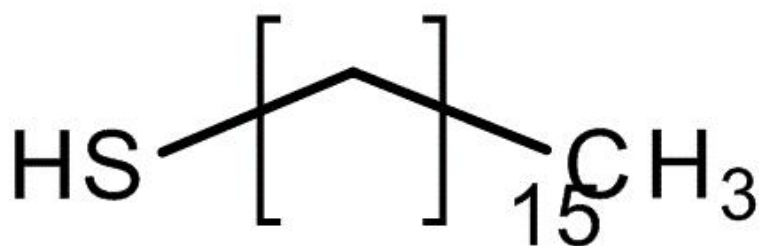

Item	Standard
Melting point	18-20 °C(lit.)
Boiling point	184-191 °C7 mm Hg(lit.)
Density	0.84 g/mL at 25 °C(lit.)
Vapor pressure	<0.1 hPa (20 °C)
Refractive index	n <sub>20</sub> /D 1.462(lit.)
Flash point	215 °F



# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China

Contact: +86-18653132120

Website:[www.unilongmaterial.com](http://www.unilongmaterial.com)

---

## **Application:**

Hexadecanethiol is used for electroplating and its chemical additives. In addition, Hexadecanethiol is also an important intermediate and raw material for the synthesis of fine and pharmaceutical sulfur-containing products.

## **Package:**

25kg/drum or according to customers requirements.

Unilong Industry