




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: Light Stabilizer 622**

**CAS: 65447-77-0**

**Molecular Weight: 347.45**

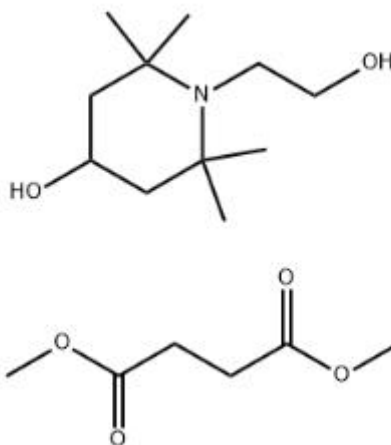

Item	Specification
Purity	99%
solubility	H <sub>2</sub> O: 1.6 ppm ,20 °C
Melting point	>350 °C(lit.)
flash point	428 °F
Storage conditions	Sealed in dry,Room Temperature
SOLUBLE	1.6 ppm at 20 °C

## Application:

Light Stabilizer 622 is a polymer light stabilizer with multiple functional groups. The Light Stabilizer 622 can be used for low-density polyethylene films, polypropylene tapes, EVA films, ABS, PP fiber PE, polyoxymethylene, polyamide, polyurethane, polyvinyl chloride, PVC blends, polystyrene, rubber, and adhesives. It can use ultraviolet adsorbents due to its unique structure and high molecular weight (3000). The Light Stabilizer 622 can also be used in movies and fibers. It can also be used as an antioxidant and a heat stabilizer for polymers, with a dosage of 0.2% for agricultural films

## Package:

Usually packed in 25kg/drum,and also can be do customized package.