




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Methyl cellulose

CAS: 9004-67-5

Molecular Weight: 454.50912

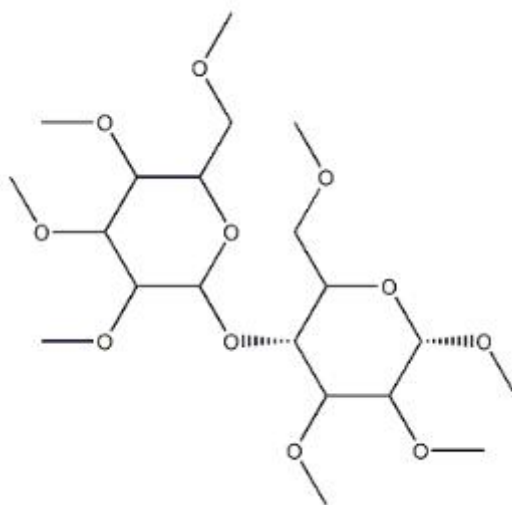

Item	Specification
Odor	tasteless
Density	1.01 g/cm ³ (Temp: 70 °C)
Melting point	290-305 °C
Flavor	odorless
SOLUBLE	SOLUBLE IN COLD WATER
Storage conditions	Room Temperature

Application:

Methyl cellulose is widely used in the construction industry, such as as an adhesive for cement, mortar, joint debonding, etc. Used as a film-forming agent and adhesive in the cosmetics, pharmaceutical, and food industries. Methyl cellulose is also used as a sizing agent for textile printing and dyeing, a dispersant for synthetic resins, a film-forming agent for coatings, and a thickener. Alkali cellulose is prepared from pulp, which is then reacted with chloromethane or dimethyl sulfate in an autoclave



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

and refined with warm water.

Package:

Usually packed in 25kg/drum,and also can be do customized package.

Unilong Industry