




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: TINUVIN 123

CAS: 129757-67-1

Molecular weight: 685.09

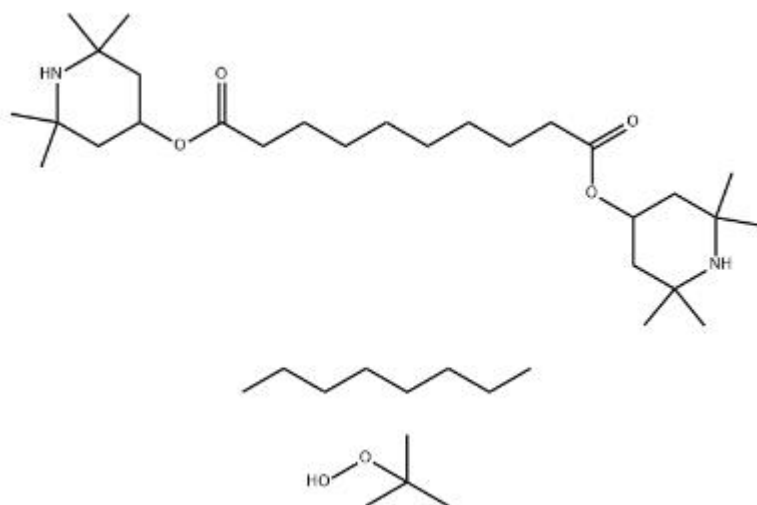

Item	Standard
Ash content	≤0.1%
Boiling point	499.8°C at 760 mmHg
Volatile matter	≤1%
Vapor pressure	4.03E-10mmHg at 25°C
Flash point	256°C
Light transmittance	425nm:≥96% 500nm:≥98%



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

TINUVIN 123 is mainly used in automotive coatings, industrial coatings, decorative coatings and wood coatings. TINUVIN 123 is often used in combination with ultraviolet absorber 1130 or 928, etc., which has a good inhibition effect on loss of light, cracking, foaming and shedding.

Package:

200kg/drum or according to customer requirements.

Unilong Industry