




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Tetrahydrofurfuryl acrylate

CAS: 2399-48-6

Molecular weight: 156.18

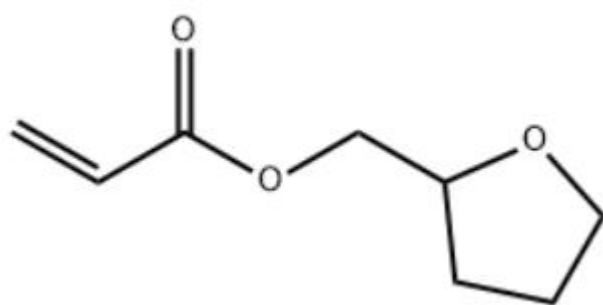

Item	Standard
Boiling point	87 °C/9 mmHg (lit.)
Density	1.064 g/mL at 25 °C (lit.)
Vapor pressure	1.19hPa at 25°C
Refractive index	n ₂₀ /D 1.46(lit.)
Flash point	>230 °F
Water solubility	79.1g/L at 20.9°C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

When the acrylic resin with tetrahydrofurfuryl acrylate as the copolymerization component is used with the amino resin, it can be cured at a low temperature (about 100°C). At the same time, its molecular valence bond has a certain flexibility, and it can play a plasticizing effect when used with other resins. In addition, tetrahydrofurfuryl acrylate can also be used as a monomer dilution Chemicalbook agent in ultraviolet (UV) curing products, but also widely used in light curing adhesives, coatings, inks and other fields.

Package:

200kg/drum or according to customer requirements.

Unilong Industry