




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: UV-329**

**CAS: 3147-75-9**

**Molecular weight: 323.43**

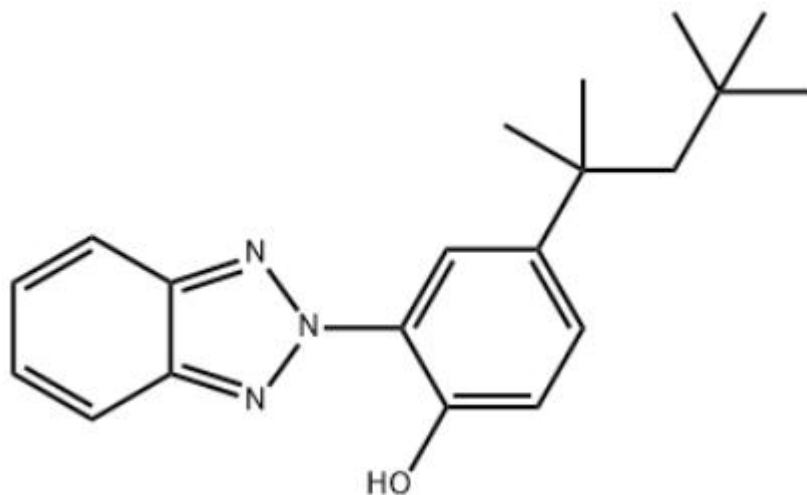

Item	Standard
Melting point	106-108 °C(lit.)
Boiling point	471.8±55.0 °C(Predicted)
Density	1.10±0.1 g/cm <sup>3</sup> (Predicted)
Vapor pressure	0Pa at 20°C
Acidity coefficient (pKa)	8.07±0.45(Predicted)
Water solubility	2µg/L at 20°C
LogP	7.290 (est)



## Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

---

### **Application:**

UV absorber UV-329 is widely used in PE, PVC, PP, PS, PC, polypropylene fiber, ABS resin, epoxy resin, resin fiber and ethylene vinyl acetate and other Chemicalbook surface, and can be used in plastic containers and food packaging materials, providing them with good light stabilization effect. Almost does not absorb visible light, especially suitable for colorless transparent and light-colored products.

### **Package:**

25kg/drum or according to customer requirements.

Unilong Industry