




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: UV 538**

**CAS: 2985-59-3**

**Molecular weight: 382.54**

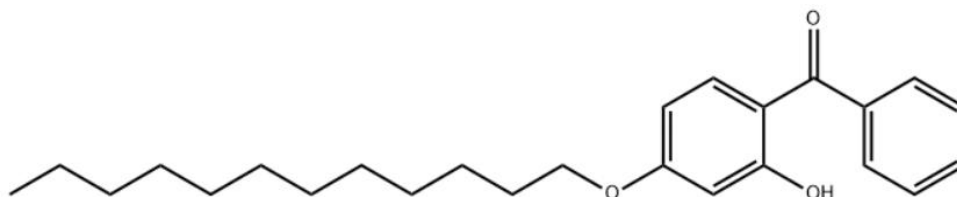

Item	Standard
Melting point	49-50 °C
Boiling point	506.3±35.0 °C(Predicted)
Density	1.029±0.06 g/cm <sup>3</sup> (Predicted)
Acidity coefficient (pKa)	7.58±0.35(Predicted)

## Application:

Uv-538 is a replacement of UV-531 and UV-9. The product is non-toxic, non-flammable, non-explosive, non-corrosive, good storage stability, can absorb 270-340nm ultraviolet light, prevent photoaging, cracking and brittleness of polymer materials, and greatly extend the service life of materials. Because of its excellent performance, it is widely used in polyethylene, polypropylene, acrylic, various high-grade coatings and automotive paints abroad.

## Package:

25kg/drum or according to customer requirements.