




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: UV Absorber 326

CAS: 3896-11-5

Molecular weight: 315.8

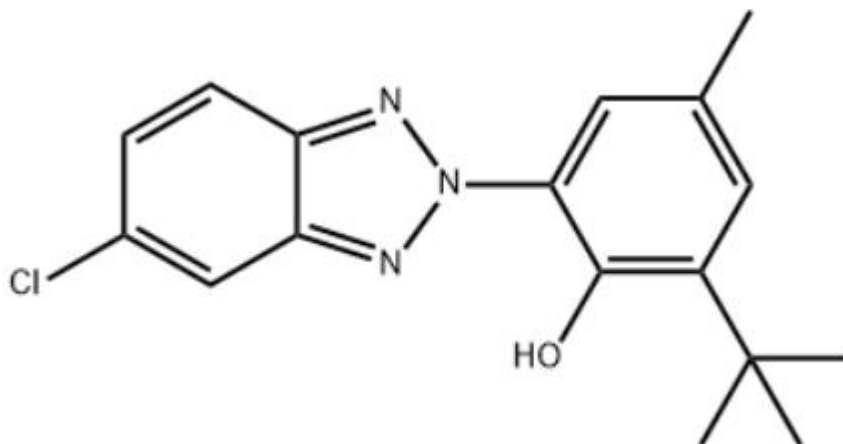

Item	Standard
Melting point	144-147 °C(lit.)
Boiling point	460.4±55.0 °C(Predicted)
Density	1.26±0.1 g/cm3(Predicted)
Vapor pressure	0Pa at 20°C
Acidity coefficient (pKa)	9.31±0.48(Predicted)
Water solubility	4µg/L at 20°C
LogP	6.580 (est)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

The Absorber is stable and non-toxic. The absorber is mainly used in polyolefins, polyvinyl chloride, unsaturated polyester, polyamide, polyurethane, epoxy resin, ABS resin and cellulose resin, and is suitable for natural rubber and synthetic rubber.

Package:

25kg/drum or according to customer requirements.

Unilong Industry